

# Fast, Accurate Hazardous Element Detection

with Axon Technology<sup>™</sup>—high count rate and stable spectra for low limits of detection (LODs)



## **Environmental Compliance**

Vanta analyzers are compatible with the requirements of US EPA 6200; EPA TCLP HAZMAT; ISO/DIS 13196; US EPA, NIOSH, and OSHA.



### **Durable**

All Vanta<sup>™</sup> models are built to pass a 4-foot drop test (MIL-STD-810G).



## **Easy Data Management**

Optional wireless connectivity enables real-time data uploads and downloads, as well as instant back-up to the Olympus Scientific Cloud.



## **Performs in All Environments**

Fully functional in temperatures ranging from 14 °F to 122 °F (-10 °C to 50 °C)\*. IP55 (C and L series) and IP54 (M series) rated for protection against dust and water intrusion.



## Simple Interface

Smartphone-like operation: swipe, flick, and tap. Customize home screen buttons for frequently used operations.



# Accessories

### Soil Foot

The Vanta Soil Foot provides stable, three-point support for hands-free analysis, making it convenient when longer test times are required.

### Field Stand

The Vanta Field Stand offers a lightweight, mobile test stand and a shielded sample chamber for testing small items, like samples in cups or bags.

### Holster

Keep your analyzer within arm's reach. The Vanta Holster features a security strap, MOLLE/ PALS webbing for additional attachments, and brass shielding.

## **Eyelid Shutter**

Automatic eyelid shutter helps prevent costly detector damage (C and M series).

Olympus stands behind every rugged, reliable Vanta analyzer with a standard 3-year warranty

## The Vanta™ Series

Olympus manufactures Vanta analyzers to suit a variety of applications depending on your needs. Each Vanta analyzer is engineered for durability and analytical superiority and comes with a 3-year warranty.

#### **M** Series

Our most powerful Vanta analyzers feature exceptional performance. Each M Series analyzer comes equipped with a large-area silicon drift detector, your choice of either a rhodium (Rh) or tungsten (W) anode, and a 50 kV X-ray tube.

#### **C** Series

The C Series combine value with superior speed, limits of detection (LODs), and elemental range. Each C Series analyzer is equipped with a silicon drift detector and your choice of a 40 kV X-ray tube with a rhodium (Rh) or tungsten (W) anode, or a 50 kV X-ray tube with a silver anode.

#### L Series

Get the ruggedness, ease of use, and data management features of Vanta analyzers in a cost-effective PIN instrument. The L Series is designed for maximum uptime and a lower cost of ownership for reliability in the field.


# Model Comparison: Selected LODs (ppm)

	Cr	Hg	As	Pb	Se	Ag	Cd	Ba*
VMW	7	1	1	1	1	2	2	5
VCW	10	1	1	2	1	2	2	7
VLW	55	7	2	5	2	5	8	20

LOD based on 120-second per beam test and an ideal clean matrix with no interfering elements. Performance may vary.

<sup>\*</sup>Ba ordered separately.



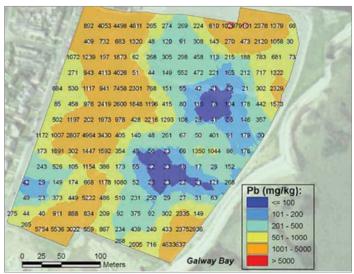

GPS XRF concentration contour map delineating Pb patterns in a  $20 \text{ m} \times 20 \text{ m}$  sports park.

is certified to ISO 9001, ISO 14001, and OHSAS 18001. \*With optional fan. Operates continuously at 33 °C without the fan.

OLYMPUS SCIENTIFIC SOLUTIONS AMERICAS CORP.

www.olympus-ims.com

www.guantanalica.com



OLYMPUS SCIENTIFIC SOLUTIONS AMERICAS CORP.

48 Woerd Avenue, Waltham, MA 02453, USA, Tel.: (1) 781-419-3900 110 Magellan Circle, Webster, TX 77598, USA, Tel.: (1) 281-922-9300